

NEED MORE STORAGE?

CONCRETE CISTERN tanks are definitely your best value and have been the accepted standard worldwide for over 60 years.

BOOM CONCRETE CISTERN tanks are designed and built with high quality components including specially formulated concrete, steel rebar, and concrete fiber, which is embedded throughout the tank.

BOOM CONCRETE CISTERN tanks come in standard sizes of 1,500 gallons, 2,000 gallons, and 2,900 gallons. CISTERN tanks are kept in stock for immediate delivery.

BOOM CONCRETE will deliver to your site and set the tank in the prepared location.



Medium Well Pit



Truck and trailer loaded with tanks ready for delivery

Tank Warranty

Standard concrete septic tanks should not be more than 48 inches below ground level. If the tank is to be deeper or if any vehicular traffic is expected over the tank, a specially designed tank must be installed.

Boom Concrete, Inc. concrete tanks (septic, cistern, or well pit) when installed in accordance with the manufacturer's instructions are warranted against defective materials and/or workmanship for 5 years from date of delivery to the project site. Boom Concrete, Inc. liability is limited to the value of the concrete tank itself and excludes the cost of installation and/or removal.

Boom Concrete, Inc.
220 Girard Ave.
PO Box 437
Newell, SD 57760

Phone: 605-456-2600
800-464-2600
Fax: 605-456-6060
Email: concrete@boomcon.com
Web: www.boomcon.com
January 1, 2018



*Precast Concrete
Well Pit / Utility Boxes*

BOOM
CONCRETE, INC.
Newell, S.D.

Quality Concrete Products

BOOM CONCRETE WELL PIT / UTILITY BOXES

- Complete tanks with no assembly.
- Quick and easy setting in the hole.
- Tanks are extra-reinforced.
- Tanks are produced in a climate controlled, indoor plant.
- Each well pit has a 30" opening in the top of the tank.
- In stock for immediate delivery.


TANK SPECIFICATIONS:

The standard and large well pits have openings offset on both ends, with a plastic seal that can be cut from 1 1/2" to 4" size as needed. The medium well pit has openings off-set on four sides, with a plastic seal that can be cut from 1 1/2" to 4" size as needed. Top riser opening is 30" diameter, 2 foot tall tile, with a plastic cover.

PRECAST CONCRETE WELL PIT / UTILITY BOXES


Well Pit	W	L	H	Riser Concrete	Weight
Std 2pc	50"	96"	80"	2'	3 Ton
Med 2pc	72"	102"	82"	2'	5 Ton
Lg 2pc	84"	144"	72"	2'	8 Ton

2 - Piece STANDARD Well Pit (In Stock)

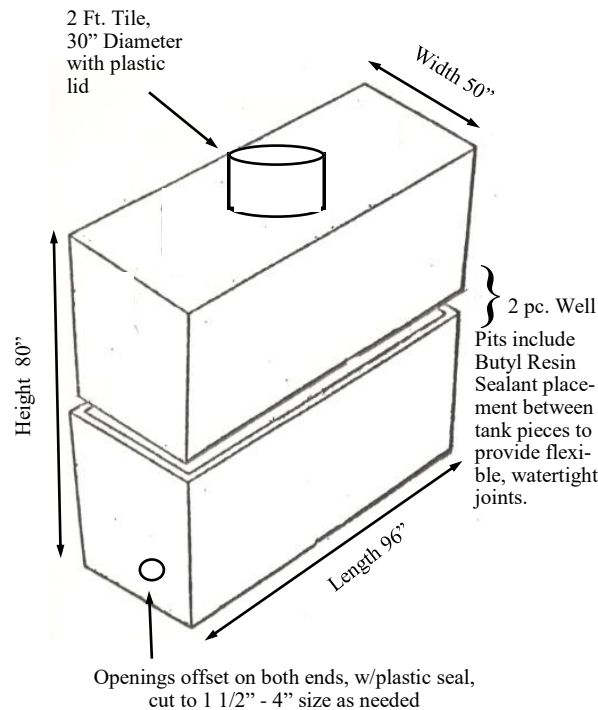

(Well Pits are not drawn to scale)

2 - Piece MEDIUM Well Pit (In Stock)

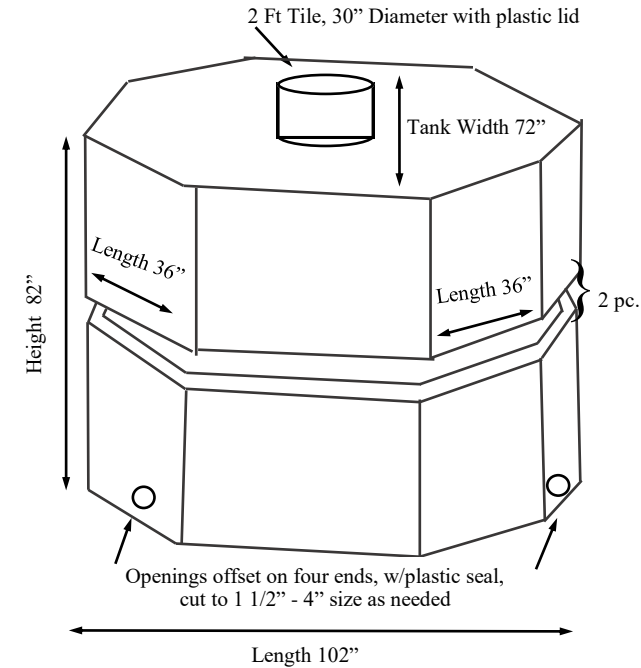

2-Piece LARGE Well Pit (Special Order Only)

