

NEED EXTRA STORAGE? CONCRETE CISTERN TANKS

Livestock water is essential for the life, growth, and reproduction of your animals. Livestock should have access to water at all times. Deficiency in the quantity of water will decrease the performance of your livestock. The typical average water consumption for a beef cow is approximately 45 gallons per day, with that quantity rising an average of 10 gallons per day during the summer months.

To provide ample water for your livestock consider extra storage with concrete cisterns. Boom Concrete Cisterns are available in three sizes: 1,200 gallons, 1,850 gallons, and 2,900 gallons. Combine several cisterns to get your needed storage capacity.

BOOM CONCRETE CISTERN tanks are designed and built with high quality components including specially formulated concrete, steel rebar, and concrete fiber, which is embedded throughout the tank.



Combine cisterns for needed storage capacity.

1400 Gallon Winter Stock Tanks also available



1400 Gallon Winter Stock Tank



Winter Stock Tank (Partially buried)

STOCK WATER TANKS



*Float or Hydrant Style
Summer or Winter Style
Cattle or Sheep Style*

BOOM
CONCRETE, INC.
Newell, S.D.

Quality Concrete Products

Boom Concrete, Inc.
220 Girard Ave.
PO Box 437
Newell, SD 57760

Phone: 605-456-2600
800-464-2600
Fax: 605-456-6060
Email: concrete@boomcon.com
Web: www.boomcon.com
January 1, 2015



Stock Water Tanks

- Complete tanks with no assembly.
- Quick and easy setting.
- Approved for use in the NRCS Conservation Programs.
- Tanks are extra-reinforced.
- Tanks are produced in a climate controlled, indoor plant.
- In stock for immediate delivery.

FOUR BASIC TANK STYLES:

1. **Float Style** - with hole in center and 30" tile for float.
2. **Hydrant Style** - without hole in the center.
3. **Sheep Tank** available with shorter side walls.
4. **Winter Tank** available with lid.



1000 Gallon Stock Tank Without Hole




1000 Gallon Stock Tank With Hole



Wildlife Ladder



30" Tile for Float



Livestock Waterer Pad (15" hole in center)


1000 GALLON TANK SPECIFICATIONS:

All four sides are made the same, with 4" width at the top and 7" width at the bottom. The tank floor is 4" thick. Rebar is placed 12" on center each way. Redi-Mix is 4500# psi with fiber.

- Reinforced with 3/8" rebar.
- Both ends have 2" plastic threaded female pvc outside and 2" glue-in female inside (not threaded).
- Hook in the middle on long sides for easier installation.
- Lids are available with openings on either one end (10' lid) or both ends (8' lid) to leave a 2' open drink area.

Cross Section of 1000 Gal Stock Water Tank

(Not Drawn to Scale)

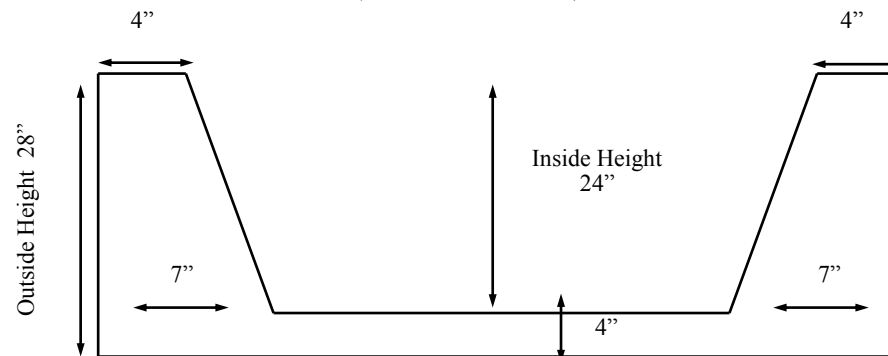

Tank dimension are 6' 6" by 12'
*Weight approximately 8000 pounds